



IEG-TQ07MM 18x1,5

ELECTROMAGNETIC LEVEL INDICATORS WITH TWO CONTACTS AND M18x1,5 CONNECTION

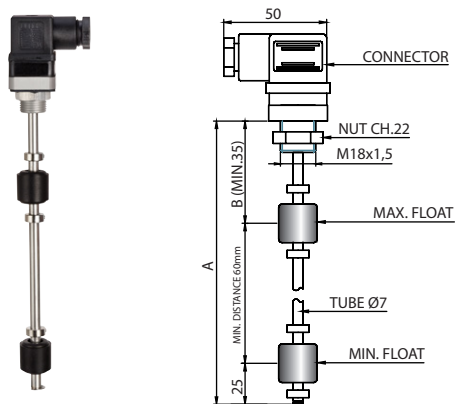

CONNECTION:
Connector CE
EN 175301-803-A
IP65 PG.9/11



USE:

Made to ensure, with maximum safety, the minimum levels of liquids in tanks, and hydraulic power packs containing mineral oils with viscosity not higher than 220 cSt. and for all non-corrosive and inflammable liquids.

OPERATION:

When the float of the indicator encounters the Reed switch incorporated in the tube at the pre-established distances, the contact activated by the magnet housed in the float opens or closes, thus obtaining the possibility of sending a luminous or acoustic signal or disconnecting any electrical equipment connected to it.

FITTING:

The indicator must be fitted in the vertical position, and the float must be at least 35mm from ferrous surfaces (walls, tanks, etc.).
The tight's flange is ensured by a flat synthetic rubber gasket and by a locking nut.
Since the diameter of the float is greater than the diameter of passage hole on the tank during installation you must fix the gauge to the tank and replace the float.

MODEL	PIPE MATERIAL	CONNECTION	ELECTRICAL CONTACTS	ELECTRICAL CHARACTERISTICS					TEMPERATURE		MAX. PRESSURE
				POWER COMMUTABLE IN D.C.	POWER COMMUTABLE IN A.C.	CURRENT STRENGTH IN A.C.	COMMUTABLE VOLTAGE	PROTECTION	RANGE	TEFLON WIRES	
IEG - TQ07MM 18X1,5	INOX	M18 x 1,5 ALUMINUM	SPST	40 W 4	0 V.A.	2 A	230 VDC 230 VAC	IP 65	-20 +80°C	-20 +120°C	10 Bar