
## **TCSL**

## TCSL/P

## **OIL FILLER AND BREATHER CAPS WITH LABYRINTH**

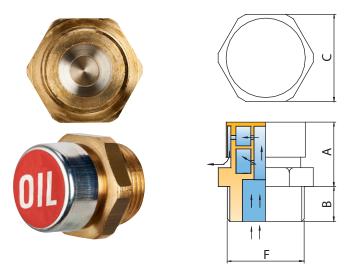

This new-concept breather cap is recommended for:


- reduction units
- machine tools
- compressors, etc.

For "medium" oil splash. It consists of an ample vapour vent chamber.

- Body in brass OT 58
- Oilproof gasket.

GAS TYPE	F	Α	В	С
T C S L 1/8"	1/8" GAS	16	7	14
T C S L 1/4"	1/4" GAS	20	9	17
T C S L 3/8"	3/8" GAS	19	9	20
T C S L 1/2"	1/2" GAS	19	10	24
T C S L 3/4"	3/4" GAS	24	12	32
TCSL 1"	1" GAS	29	14	40
METRIC TYPE	F	Α	В	С
TCSL 14 x 1,5	M 14 x 1,5	20	9	17
TCSL 16 x 1,5	M 16 x 1,5	19	9	22
TCSL 18 x 1,5	M 18 x 1,5	19	9	22
TCSL 20 x 1,5	M 20 x 1,5	22	10	24
TCSL 22 x 1,5	M 22 x 1,5	20	10	27

## OIL FILLER AND BREATHER CAPS WITH LABYRINTH AND SINTERED WASHER



This range of oil breather caps has the same constructional characteristics as the TCSL, with the addition of a sintered bronze washer in the bottom part of the vent chamber, making it suitable for a "heavier duty" and therefore suitable for reduction units, overdrives, building machinery, road machinery, etc.

GAS TYPE	F	Α	В	С
TCSL/P 1/8"	1/8" GAS	16	7	14
TCSL/P 1/4"	1/4" GAS	20	9	17
TCSL/P 3/8"	3/8" GAS	19	9	20
TCSL/P 1/2"	1/2" GAS	19	10	24
TCSL/P 3/4"	3/4" GAS	24	12	32
TCSL/P 1"	1" GAS	29	14	40
METRIC TYPE	F	Α	В	C
TCSL/P 12 x 1,5	M 12 x 1,5	20	9	17
TCSL/P 14 x 1,5	M 14 x 1,5	20	9	17
TCSL/P 16 x 1,5	M 16 x 1,5	19	9	22
TCSL/P 18 x 1,5	M 18 x 1,5	19	9	22
TCSL/P 20 x 1,5	M 20 x 1,5	22	10	24
TCSL/P 22 x 1,5	M 22 x 1,5	20	10	27

- Body in brass OT 58.
- Oilproof gasket.