

TM/MI


METAL PLUGS WITH ENCASED MAGNET



- Body material: steel galvanized white
- Sealing: NBR synthetic rubber.
- Magnet: neodymium 35 galvanized
- Maximum operating temperature continuous: 80° C

For adequate quantities, there is a neodymium magnet suitable for temperatures up to 160 ° C.

- The magnet encased eliminates any risk of interference in the internal rotary movements.
- Magnetic field up to ten times higher than that of conventional ferrite magnets.
- Galvanizing LANTHANE for greater resistance to salt spray test.

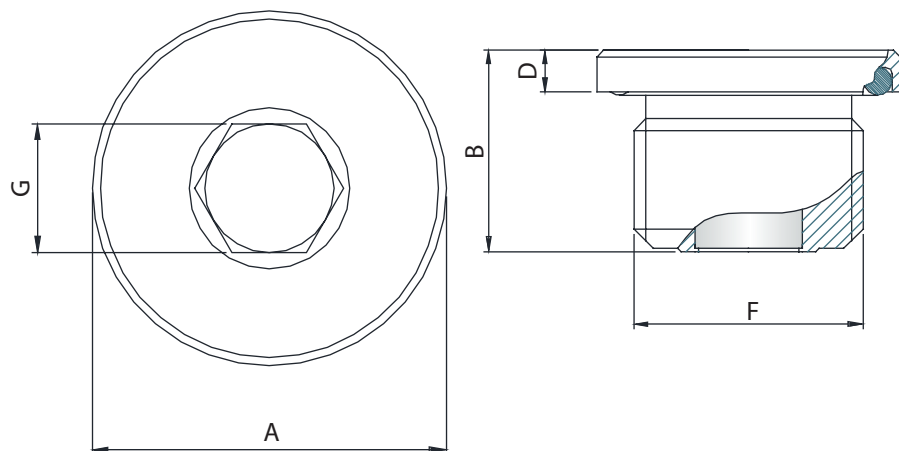

GAS TYPE	TIGHTENING TORQUE -Nm	MAX. PRESSURE (bar)	F	A	B	D	G
TM-MI 1/8" GAS	8	250	1/8" GAS	14	10,7	3	5
TM-MI 1/4" GAS	11		1/4" GAS	18	14,6	3	6
TM-MI 3/8" GAS	15		3/8" GAS	22	14,6	3	8
TM-MI 1/2" GAS	19		1/2" GAS	26	17,6	4	10
TM-MI 3/4" GAS	25		3/4" GAS	32	19,6	4	12
TM-MI 1" GAS	33		1" GAS	39	20,6	5	17
TM-MI 1"1/4 GAS	47		1"1/4 GAS	49	20,6	5	22
TM-MI 1"1/2 GAS	57		1"1/2 GAS	55	20,6	5	24